

(with standard depth sleeve)

PTAC SERIES A
QUICK SPECS

COOL SERIES

AHES07D2XXA
AHES07D3XXA
AHES09D2XXA
AHES09D3XXA
AHES12D3XXA
AHES15D3XXA

HEAT PUMP SERIES

AHHS07D2XXA
AHHS07D3XXA
AHHS09D2XXA
AHHS09D3XXA
AHHS12D3XXA
AHHS15D3XXA
AHHS09E3XXA
AHHS12E3XXA

KEY PRODUCT POINTS

Fan Speeds	**2**
Auto Dimming Display	✓
Slinger Condensate Removal	✓
Automatic Emergency Heat	✓
Freeze Frost Protection	✓
Overheat Protection	✓
Auto Power Recovery	✓
Self-Diagnostics	✓
Constant Fan Button	✓
24 VAC Remote Wall Thermostat (requires kit, purchased separately)	✓
Voltage (Unit Specific)	**230-208V /1Ph / 60Hz/ 265V/1Ph/60Hz**
Amperage (Unit Specific)	**15 or 20 Amp Options**
Attached Cord (230V models only)	✓
Control Panel	**LED**
Refrigerant	**R32**
Filter	**Removable/Washable**
Installation Hardware	✓
Accessories & Replacement Parts	**Sold Separately**



GE APPLIANCES IS COMMITTED TO REDUCING OUR ENVIRONMENTAL IMPACT

WARRANTIES

1-Year Full Parts & Labor
2-5 Year Limited Warranty
5 Year Limited Warranty

AHRI CERTIFIED® www.ahridirectory.org
Packaged Terminal AC
AHRI Standard 310/380

c UL® UL LISTED

Hotpoint® America's hardest working appliances.


HOTPOINT COOL SERIES A

	HOTPOINT COOL SERIES A 230/208V COOLING WITH ELECTRIC RESISTANCE HEAT					
	AHES07D2XXA	**AHES07D3XXA**	**AHES09D2XXA**	**AHES09D3XXA**	**AHES12D3XXA**	**AHES15D3XXA**
SPECIFICATIONS						
Voltage	230-208V /1Ph / 60Hz					
Amperage	15A	20A	15A	20A	20A	20A
Cooling Capacity BTUh	7,200/7,000	7,200/7,000	9,400/9,200	9,400/9,200	12,400/12,200	14,500/14,300
Cooling Power (W)	600/575	600/575	830/805	830/805	1,190/1,160	1,490/1,470
Electric Heating Capacity (kw)	2.5	3.5	2.5	3.5	3.5	3.5
Airflow (CFM)	480/400	480/400	500/420	500/420	600/530	630/530
Fresh Air (CFM) Requires RAKVENTH Kit	16.8/17.5	16.8/17.5	16.8/17.5	16.8/17.5	16.8/17.5	16.8/17.5
EER	12.0/12.1	12.0/12.1	11.3/11.4	11.3/11.4	10.4/10.5	9.7/9.7
Dehumidification (pt/hr)	0.95	0.95	1.86	1.86	2.85	4.02
Sensible Heat Ratio	88.5	88.5	79	79	73.5	72.4
Refrigerant	R32					
Refrigerant Charge (Oz)	12.35	12.35	13.76	13.76	16.58	17.28
WEIGHTS & DIMENSIONS						
Chassis with Sleeve Height (In)	16	16	16	16	16	16
Chassis with Sleeve Width (In)	42	42	42	42	42	42
Chassis with Sleeve Depth (In)	21	21	21	21	21	21
Shipping Weight (Lbs)	89.96	89.96	94.37	94.37	102.09	104.30
Net Weight (Lbs)	79.38	79.38	83.79	83.79	91.51	93.71
FEATURES						
Heat Pump Defrost	NA	NA	NA	NA	NA	NA
Heat Pump Low Operation Temp	NA	NA	NA	NA	NA	NA
24V Wall Thermostat Capable with Optional Kit	RAKDTKH	RAKDTKH	RAKDTKH	RAKDTKH	RAKDTKH	RAKDTKH
Power Supply Cord	Fixed Cord with LCDI					
Plug Type	NEMA 3-15P	NEMA 3-20P	NEMA 3-15P	NEMA 3-20P	NEMA 3-20P	NEMA 3-20P
Compressor	Rotary Compressor					
Fresh Air Kit (if required)	RAKVENTH	RAKVENTH	RAKVENTH	RAKVENTH	RAKVENTH	RAKVENTH
Touch Pad w/ LED, Temp and Mode Display	Green LEDs	Green LEDs	Green LEDs	Green LEDs	Green LEDs	Green LEDs
Fan Speed: Cooling (High, Low)	Yes	Yes	Yes	Yes	Yes	Yes
Fan Speed: Heating (High, Low)	Yes	Yes	Yes	Yes	Yes	Yes
Fan Only Speed Selections (High, Low)	Yes	Yes	Yes	Yes	Yes	Yes
Automatic Indoor Frost Control	Yes	Yes	Yes	Yes	Yes	Yes
Fan Motor	DC, Variable	DC, Variable	DC, Variable	DC, Variable	DC, Variable	DC, Variable
Freeze Sentinel Low Temperature Protection (Dip Switch)	Yes	Yes	Yes	Yes	Yes	Yes
Air Discharge Louvers	Non-Adjustable	Non-Adjustable	Non-Adjustable	Non-Adjustable	Non-Adjustable	Non-Adjustable
Temperature Limiting	Yes	Yes	Yes	Yes	Yes	Yes
Auto Power Recovery	Yes	Yes	Yes	Yes	Yes	Yes

HOTPOINT HEAT PUMP SERIES A

	HOTPOINT HEAT PUMP SERIES A 230/208V HEAT PUMP WITH ELECTRIC RESISTANCE HEAT BACKUP							
							Hotpoint 265V	Hotpoint 265V
	AHHS07D2XXA	AHHS07D3XXA	AHHS09D2XXA	AHHS09D3XXA	AHHS12D3XXA	AHHS15D3XXA	AHHS09E3XXA	AHHS12E3XXA
SPECIFICATIONS								
Voltage	230-208V/1Ph/ 60Hz						265V/1PH/60Hz	
Amperage	15A	20A	15A	20A	20A	20A	20A	20A
Cooling Capacity BTUh	7,100/7,000	7,100/7,000	9,400/9,200	9,400/9,200	12,400/12,200	14,700/14,500	9,400	12,200
Cooling Power (W)	590/575	590/575	830/805	830/805	1,190/1,160	1,515/1,490	830	1,170
Heat Pump Capacity BTUh	6,000/5,800	6,000/5,800	8,400/8,100	8,400/8,100	11,000/10,800	13,700/13,500	8,100	11,000
Heat Pump Power (W)	515/495	515/495	745/715	745/715	1,035/985	1,335/1,315	715	1,035
Electric Heating Capacity (kw)	2.5	3.5	2.5	3.5	3.5	3.5	3.5	3.5
Air Flow (CFM)	480/400	480/400	500/420	500/420	600/530	630/530	500/420	600/530
Fresh Air (CFM) Requires RAKVENTH Kit	16.8/17.5	16.8/17.5	16.8/17.5	16.8/17.5	16.8/17.5	16.8/17.5	16.8/17.5	16.8/17.5
EER	12.0/12.1	12.0/12.1	11.3/11.4	11.3/11.4	10.4/10.5	9.7/9.7	11.3	10.4
COP	3.4/3.4	3.4/3.4	3.3/3.3	3.3/3.3	3.1/3.2	3.0/3.0	3.3	3.1
Dehumidification (pt/hr)	0.95	0.95	1.86	1.86	2.85	4.02	1.86	2.85
Sensible Heat Ratio	86.8	86.8	78.5	78.5	75.9	70.3	79.3	74.4
Refrigerant	R32							
Refrigerant Charge (Oz)	12.35	12.35	14.82	14.82	16.93	26.81	15.87	16.93
WEIGHTS & DIMENSIONS								
Chassis with Sleeve Height (In)	16	16	16	16	16	16	16	16
Chassis with Sleeve Width (In)	42	42	42	42	42	42	42	42
Chassis with Sleeve Depth (In)	21	21	21	21	21	21	21	21
Shipping Weight (Lbs)	91.07	91.07	96.58	96.58	105.40	107.60	96.58	105.40
Net Weight (Lbs)	80.48	80.48	85.99	85.99	94.81	97.02	85.99	90.41
FEATURES								
Heat Pump Defrost	No	No	No	No	No	No	No	No
Heat Pump Low operation Temp	32F	32F	32F	32F	32F	32F	32F	32F
24V Wall Thermostat Capable with Optional Kit	RAKDTKH	RAKDTKH	RAKDTKH	RAKDTKH	RAKDTKH	RAKDTKH	RAKETKH	RAKETKH
Power Supply Cord	Fixed Cord with LCDI	Fixed Cord with LCDI	Fixed Cord with LCDI	Fixed Cord with LCDI	Fixed Cord with LCDI	Fixed Cord with LCDI	Direct Connect	Direct Connect
Plug Type	NEMA 3-15P	NEMA 3-20P	NEMA 3-15P	NEMA 3-20P	NEMA 3-20P	NEMA 3-20P	N/A	N/A
Compressor	Rotary compressor							
Fresh Air Kit (if required)	RAKVENTH	RAKVENTH	RAKVENTH	RAKVENTH	RAKVENTH	RAKVENTH	RAKVENTH	RAKVENTH
Touch Pad w/ LED, Temp and Mode Display	Green LEDs	Green LEDs	Green LEDs	Green LEDs	Green LEDs	Green LEDs	Green LEDs	Green LEDs
Fan Speed: Cooling (High, Low)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Fan Speed: Heating (High, Low)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Fan Only Speed Selections (High, Low)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Automatic Indoor Frost Control	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Fan Motor	DC, Variable	DC, Variable	DC, Variable	DC, Variable	DC, Variable	DC, Variable	DC, Variable	DC, Variable
Freeze Sentinel Low Temperature Protection (Dip Switch)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Air Discharge Louvers	Non-Adjustable	Non-Adjustable	Non-Adjustable	Non-Adjustable	Non-Adjustable	Non-Adjustable	Non-Adjustable	Non-Adjustable
Temperature Limiting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Auto Power Recovery	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

ACCESSORIES

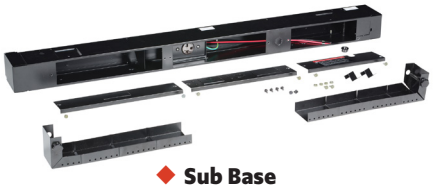

Sub Base
RAK204D20H



Sub Base Disconnect Switch Kit (230/208 & 265V)
RAK204SW



Hotpoint Replacement Air Filters, 2 pack for Series A
RAA71H



Curtain Guard
RAK44



Hotpoint Grille
(Sold Separately)
RAG70




Hotpoint Wall Sleeve
RAB42MW



Hotpoint 2 Fan Speeds Wall Thermostat
RAK148H2A



Hotpoint Thermostat Connect Kit for Series A
RAKDTKH (230/208V)
RAKETKH (265V)



Hotpoint PTAC Fresh Air Vent Kit
RAKVENTH

For more information please visit our website at **www.airdistributors.com/hotpoint-ptac**

Hotpoint America's hardest working appliances.

ADC Air Distributors Company, Inc.

913 Ulrich Ave.
Louisville, KY 40219
800-866-1210
www.airdistributors.com